



## 1963-1991 Full Size Jeep

# Door Lock Spring Installation Instructions



### Notes:

1. Note: please read through all instructions prior to removing or installing any part. If you do not feel comfortable with the instructions or in your ability to install or modify your vehicle, please take to a reputable mechanic to have them perform the installation. BJ's Off-Road can not and will not determine your ability to install this kit, and the extent of our warranty and liability only cover the components of this kit, and do not cover improper installation, abuse, neglect, labor rates, etc. Contact us with any questions prior to installation.
2. For this conversion, you will be removing and installing door lock springs (you do not need to remove the latch assembly from the door, but it does make the process easier). We will assume you have already removed the existing door lock springs for the purposes of these instructions.



Once the existing spring has been removed, using a pair of needle nose pliers you will fish one end of the spring into the hole shown here on the left.


Next, grab the other end of the spring with needle nose pliers.





While gently separating the 2 pieces with a flat bladed screwdriver, work this end of the spring into the hole that is in the part of the mechanism that moves (2<sup>nd</sup> hole... see picture below). It may take a couple of tries but it should pop right in.

This picture shows the 2<sup>nd</sup> hole from below, you can see the end of the spring sticking out in this picture.

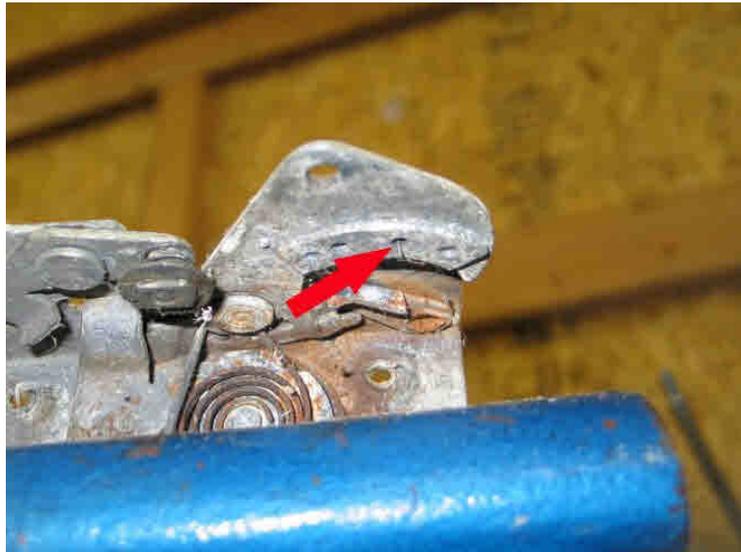

Now you are done with one, repeat the steps for the remainder of your door latches.

**The springs are painted for easy identification:**

**Silver Spring: Right Hand (Passenger Side)**

**Yellow Spring: Left Hand (Driver Side)**